

Distribuito da:



descrizione :

MODULO FOTOVOLTAICO MONOCRISTALLINO / MONOCRISTALLINE PV SOLAR MODULE

codice :


XM50/150

data :

20 / 07 / 2005

rev. n°:

05 - 1

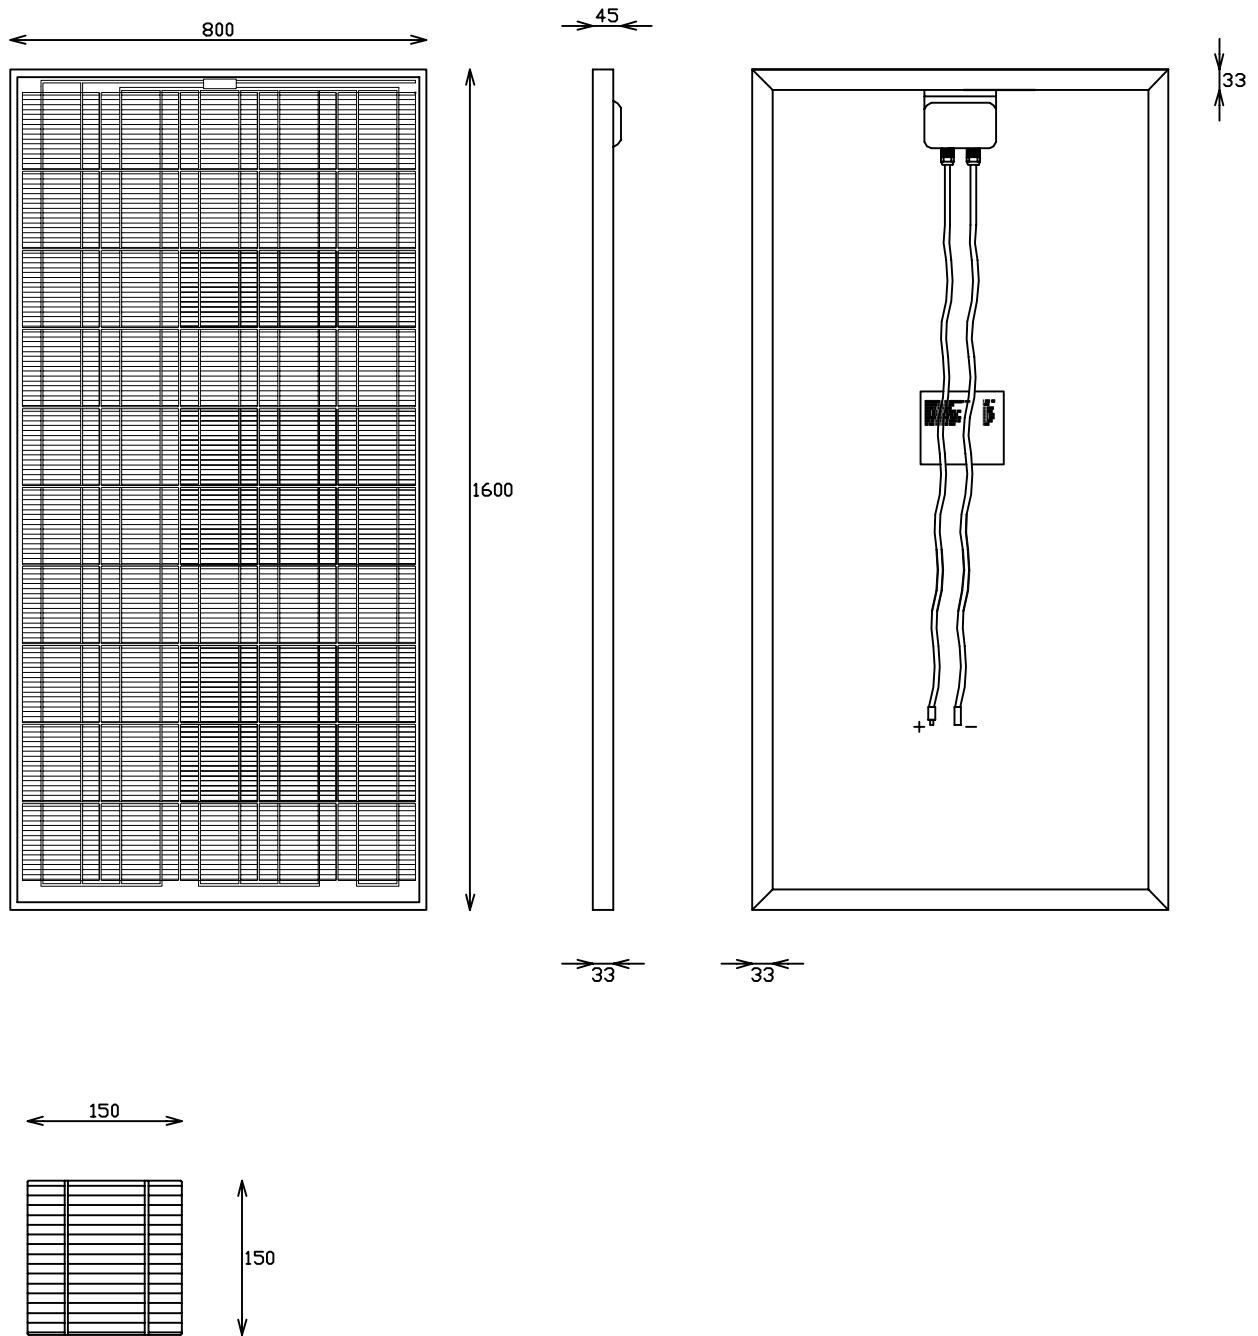

CARATTERISTICHE TECNICHE: (TECHNICAL CHARACTERISTICS)	150 Wp	145 Wp
Peack Power (P _{MAX}): (W)	150	145
Minimum Warranty Tolerance: (W)	+/- 5%	+/- 5%
Peack Power Voltage (V _{MP}): (V)	24.65	24.60
Peack Power Current (I _{MP}): (A)	6.05	6.01
Short Circuit Current (I _{SC}): (A)	7.28	7.16
Open Circuit Voltage (V _{OC}): (V)	30.20	29.85
Max System Voltage: (V _{dc})	600	600

Power measured in Std. Test Conditions illumination 1000W/mq, A.M. 1.5 Global, 25°C temperature.
 25 Yaer power output guarantee : At the end of the 25 year period, 80% of the minimum starting power rating measured in std conditions, is garanted.

NOTE: Tutte le misure sono espresse in mm, tutti i dati sono variabili senza preavviso.

www.sunergsolar.com